


Expositor refrigerado vertical ERV 53



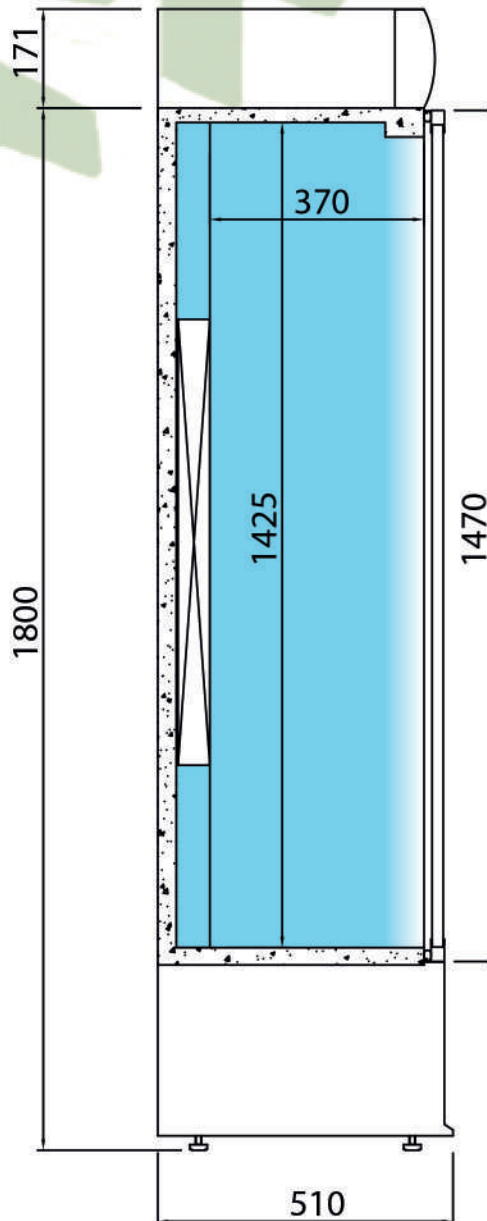

Expositor refrigerado vertical ERV 53

EXTERIOR

- Acero plastificado negro

INTERIOR

- Acero plastificado gris
- Iluminación interior
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables

AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Puertas con doble acristalamiento (6-10-4)
- Cerradura incorporada
- Burlete fácilmente sustituible
- Puertas con tirador integrado

REFRIGERACIÓN

- Sistema de condensación ventilada
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa

OPCIONAL / OPTIONAL

- Parrillas / Wire shelves ERV 53 (502X27)
- Parrillas / Wire shelves ERV 83 (502X28)
- Cabeza iluminativa / Illuminated head ERV 53 (CPERV15)
- Cabeza iluminativa / Illuminated head ERV 83 (CPERV25)

EXTERIOR

- Black plastic coated steel

INTERIOR

- Grey plastic coated steel
- Interior lighting
- Plastic coated wire shelves, adjustable height and easy removal

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors

REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

MODELOS MODELS	→	↗	↑	⏻	⚠	📦	📱	📊	🔧	❄️	💧	🌡	🔧	🔧	🌡
	Dimensiones Dimensions LxPxA (mm)	Potencia Power (W)	Tensión/Frecuencia Electrical (V/Hz)	Capacidad Capacity (L)	Nº puertas Doors	Nº parrillas/Slides No shelves / Slides	Compresor Compresor (HP)	Potencia Frig. Cooling capacity (W) (T ⁴⁰ -10°C)	Evaporación Evaporation	Régimen temperatura Temperature range (°C)	Desescarche Defrost	Control Control	Refrigerante Coolant		
ERV 53	600x510x1820	380	220/50	280	1	5	1/4	298	Forzada Forced	+4°C/+12°C	Automático Automatic	Digital	R 134 a		